

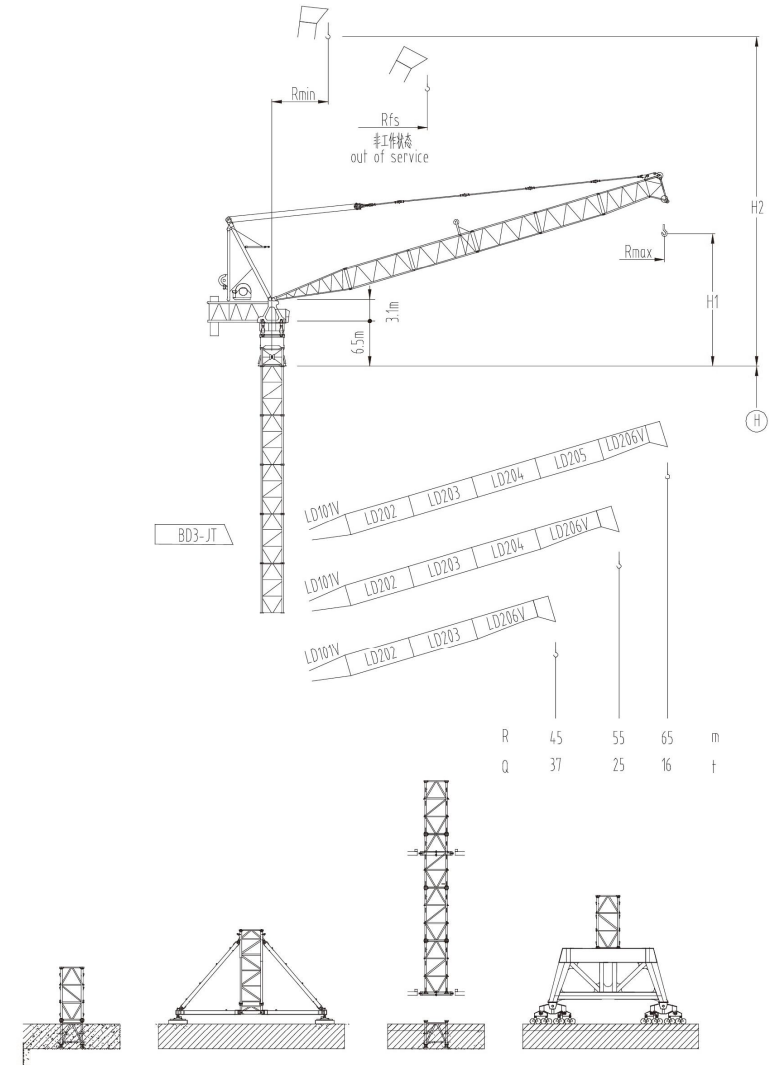


Rmax m	H1 m	Rmin m	H2 m	Rfs m
65	23	7	71.9	38.5
55	20.3	6	61.5	35
45	17.5	5	51.4	30

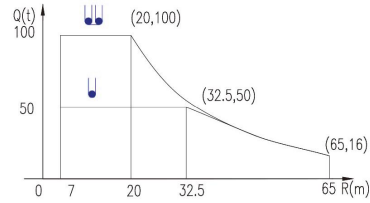


载荷曲线 Load Chart

R (m)	倍率 Fall	R(Cmax) (m)	Cmax (t)	25	30	35	40	45	50	55	60	65
65	32.5	50	50	50	48	39	32	28	23	20	16	
	20	100	79	61	48	39	32	28	23	20	16	
55	32.5	50	50	50	50	42	35	31	25			
	20	100	78	63	51	42	35	31	25			
45	32.5	50	50	50	50	43.5	37					
	20	100	78	63	52	43.5	37					

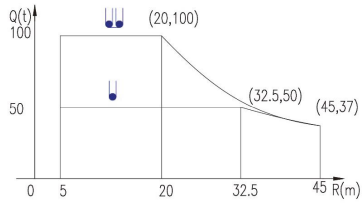

特殊载荷可定制, 请咨询
Special data is available. Additional Loads on request

自立塔身高度 Self-supporting Tower Height

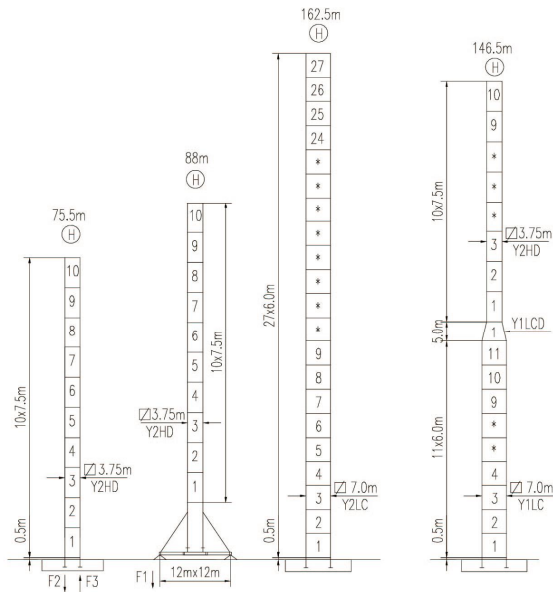

	●	■
F1	229t	232t
	*	

	●	■
F2	610t	539t
F3	437t	304t
	233t	


■ 工作状态支反力 In service reaction
 ■ 非工作状态支反力 out of service reaction
 ● 整机自由高度重量 (不含平衡重及压重)
 Total weight of free standing crane (includes counter weight & ballast)

JLD2000/100t

附着塔机 Braced Crane

□ 3.75m

内爬塔机 Internal Climbing Crane

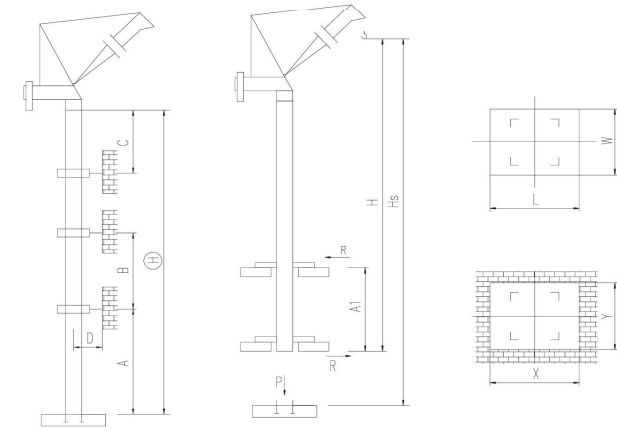

塔身节 Mast	A (m)	B (m)	C (m)	D (m)	H(m)
Y2HD	57	40	48	>5.5	400*

附着层数 Number of tie collars = (H-A-C) / B + 1

塔身节 Mast	Hs(m)	H(m)	A1(m)	P(t)	R(t)	X(m)	Y(m)	L(m)	W(m)
Y2HD					*				

主要性能参数 Specifications

机构 Mechanism	●		■		电动机 Motor kW	
	m/min	t	m/min	t		
300LF220R16	0-20	50	0-10.4	100	1600m	220
	0-25	40	0-13	80		
	0-50	20	0-26	40		
300LF315R16	0-30	50	0-15.4	100	1600m	315
	0-37.5	40	0-19	80		
	0-75	20	0-38	40		
250RA110R380	4 min				110	
15RFVCV	0 - 0.3 rpm				3x15	
RTT	*					

电压 Voltage	kVA
380V (±10%)	*

*与制造商联系咨询 Contact us, please

本技术参数不受法律约束, 技术信息请详见相应说明书。
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



hnjzk.com

保留修改权力, 恕不另行通知 | Subject to modifications