

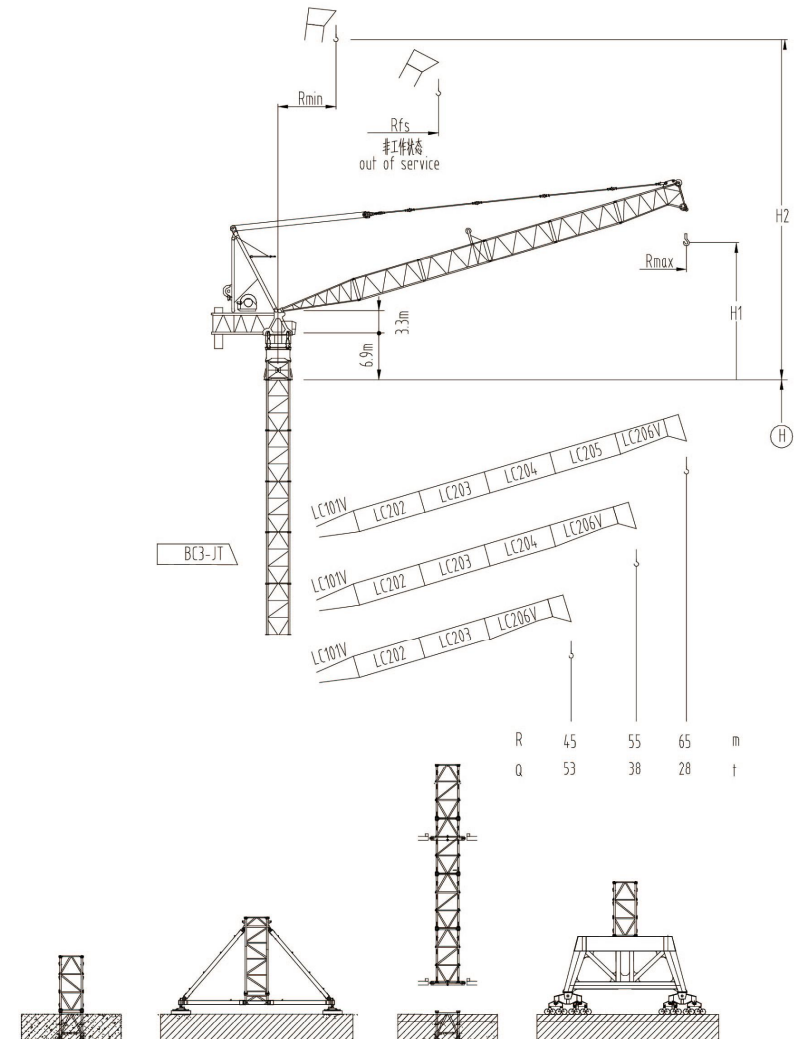


| Rmax m | H1 m | Rmin m | H2 m | Rfs m |
|-----------|---------|-----------|---------|----------|
| 65 | 22 | 10.5 | 69.2 | 45 |
| 55 | 16 | 10.5 | 59.2 | 35 |
| 45 | 13.5 | 9.5 | 49.2 | 30 |

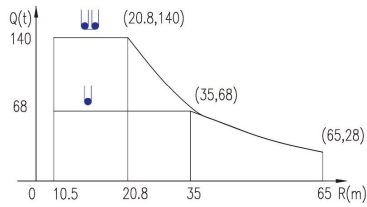


载荷曲线 Load Chart

| R (m) | 倍率 Fall | R(Cmax) (m) | Cmax (t) | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 |
|-------|---------|-------------|----------|-----|----|----|----|----|----|------|------|----|
| 65 | ● | 35 | 68 | 68 | 68 | 68 | 60 | 52 | 44 | 37.5 | 32.5 | 28 |
| | ●● | 20.8 | 140 | 110 | 88 | 72 | 60 | 52 | 44 | 37.5 | 32.5 | 28 |
| 55 | ● | 35 | 68 | 68 | 68 | 68 | 61 | 52 | 44 | 38 | | |
| | ●● | 20.8 | 140 | 112 | 89 | 73 | 61 | 52 | 44 | 38 | | |
| 45 | ● | 37.5 | 68 | 68 | 68 | 68 | 63 | 53 | | | | |
| | ●● | 20.8 | 140 | 114 | 92 | 77 | 63 | 53 | | | | |

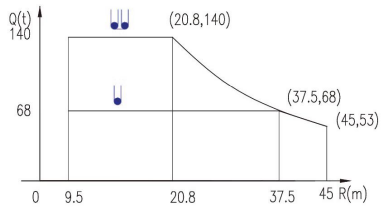

特殊载荷可定制, 请咨询
Special data is available. Additional Loads on request

自立塔身高度 Self-supporting Tower Height

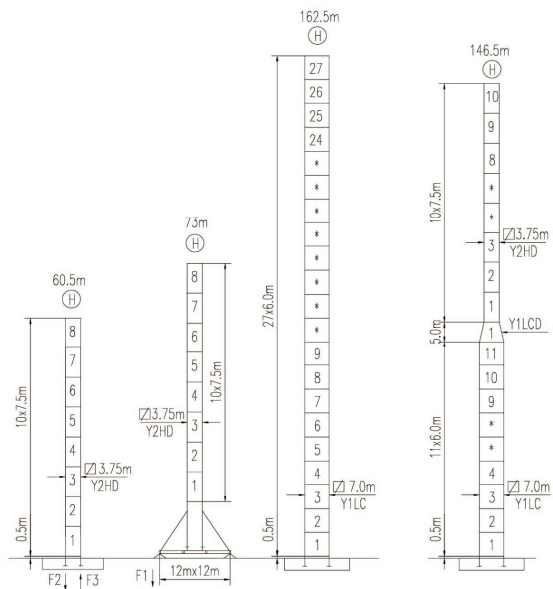

| | | |
|----|------|------|
| ● | 324t | 203t |
| ●● | | |
| ● | | |

| | | |
|----|------|------|
| ● | 811t | 433t |
| ●● | 526t | 198t |
| ● | | 412t |


■ 工作状态支反力 In service reaction
 ■ 非工作状态支反力 out of service reaction
 ● 整机自由高度重量 (不含平衡重及压重)
 Total weight free standing crane (excludes counter weight & ballast)

JLD2800/140t

附着塔机 Braced Crane

□ 3.75m

内爬塔机 Internal Climbing Crane

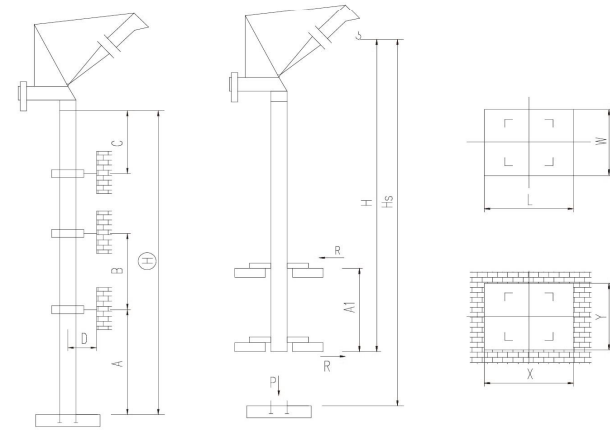

| 塔身节 Mast | A (m) | B(m) | C (m) | D (m) | H(m) |
|----------|-------|------|-------|-------|------|
| Y2HD | 42 | 29 | 35 | >5.5 | 400 |

附着层数 Number of tie collars=(H-A-C) /B+1

| 塔身节 Mast | Hs(m) | H(m) | A1(m) | P(t) | R(t) | X(m) | Y(m) | L(m) | W(m) |
|----------|-------|------|-------|------|------|------|------|------|------|
| Y2HD | | | | | * | | | | |

主要性能参数 Specifications

| 机构 Mechanism | ● | | ●● | | 电动机 Motor kW | | |
|--------------|--------------|-------------|-------|--------|--------------|--------|-----|
| | m/min | t | m/min | t | | | |
| ▲ ● ▼ | 400LF220R16 | 0-15.8 | 68 | 0-7.9 | 140 | 1600m | 220 |
| | | 0-19 | 54 | 0-9.5 | 110 | | |
| | | 0-38 | 27 | 0-19 | 55 | | |
| ▲ ● ▼ | 400LF315R16 | 0-22 | 68 | 0-11 | 140 | 1600m | 315 |
| | | 0-27 | 54 | 0-13.5 | 110 | | |
| | | 0-54 | 27 | 0-27 | 55 | | |
| ▲ | 350RA220R380 | 4 min | | | | 220 | |
| ▲ | 18RFCV | 0 - 0.3 rpm | | | | 4x18.5 | |
| ▲ | RTT | | | | | * | |

| 电压 Voltage | kVA |
|-------------|-----|
| 380V (±10%) | * |

*与制造商联系咨询 Contact us, please

本技术参数不受法律约束, 技术信息请详见相应说明书。
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



hnjzk.com

保留修改权力, 恕不另行通知 | Subject to modifications