

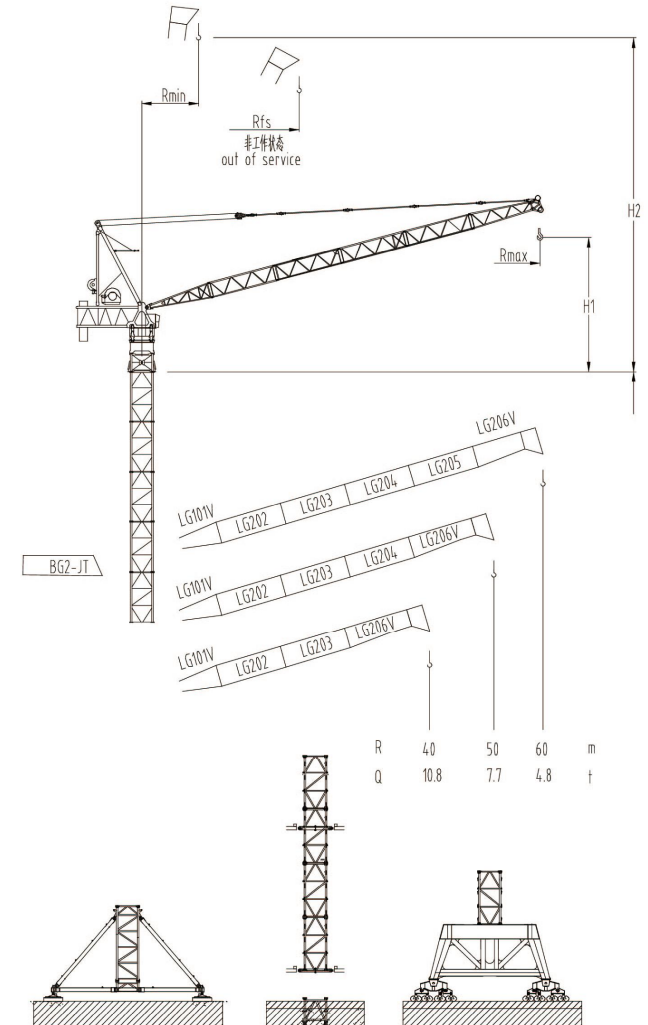


Rmax m	H1 m	Rmin m	H2 m	Rfs m
60	19.2	5.8	65.7	40
50	16.5	4.9	55.7	45
40	13.8	4	45.7	40

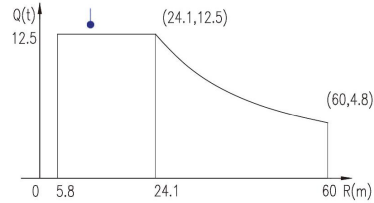


载荷曲线 Load Chart

R (m)	倍率 Fall	R(Cmax) (m)	Cmax (t)	20	25	30	35	40	45	50	55	60
60	●	24.1	12.5	12.5	12.1	10	8.5	7.4	6.5	5.8	5.3	4.8
50	●	32	12.5	12.5	12.5	12.5	11.3	9.8	8.6	7.7		
	●	22.2	18	18	16	13.2	11.2	9.8	8.6	7.7		
40	●	34.6	12.5	12.5	12.5	12.5	12.3	10.8				
	●	18	25	22.4	17.8	14.6	12.4	10.8				

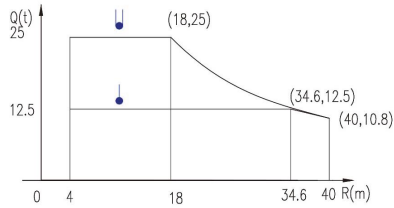

特殊载荷可定制, 请咨询
Special data is available. Additional Loads on request

自立塔身高度 Self-supporting Tower Height

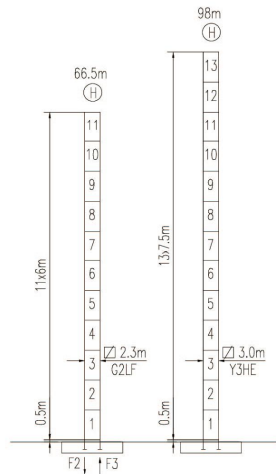

	●	■
F1	119t	124t
	135t	

	●	■
F2	245t	262t
F3	156t	195t
	128t	


■ 工作状态支反力 In service reaction
 ■ 非工作状态支反力 out of service reaction
 ● 整机自由高度重量 (不含平衡重及压重)
 Total weight free standing crane (includes counter weight & ballast)

JLD420/25t

附着塔机 Braced Crane

2.3m

内爬塔机 Internal Climbing Crane

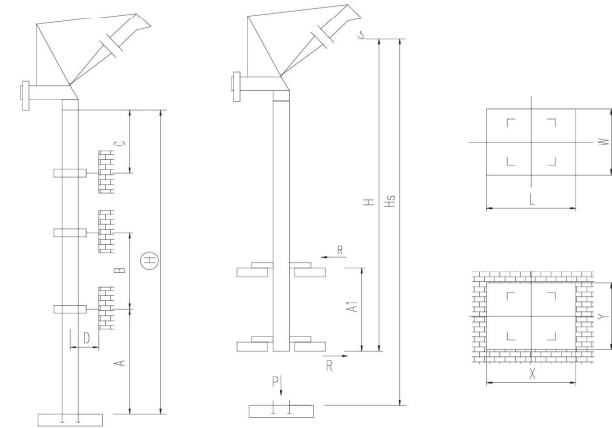

塔身 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
G2LF	52	36	44	>4	440*

附着层数 Number of tie collars = (H-A-C) / B + 1

塔身 Mast	Hs (m)	H (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
G2LF									

主要性能参数 Specifications

机构 Mechanism	●		●		电动机 Motor kW
	m/min	t	m/min	t	
▲ 160LF90R9	0-33	12.5	0-16.5	25	900m 90
	0-41	10	0-20.5	20	
	0-82	5	0-41	10	
▼ 160LF110R9	0-43	12.5	0-21.5	25	900m 110
	0-53	10	0-26.5	20	
	0-106	5	0-53	10	
225RA75R380	4 min				75
11RFCV	0-0.6 rpm				2x11
RTT	*				

电压 Voltage	kVA
380V (±10%)	*

*与制造商联系咨询 Contact us, please

本技术参数不受法律约束, 技术信息请详见相应说明书。
 Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



hnjzkc.com

保留修改权力, 恕不另行通知 | Subject to modifications