


# 2500系列

JLD600



32t

Rmax m	H1 m	Rmin m	H2 m	Rfs m
60	19.2	7	65.7	40
50	16.5	6.5	55.7	45
40	13.8	5.5	45.7	40

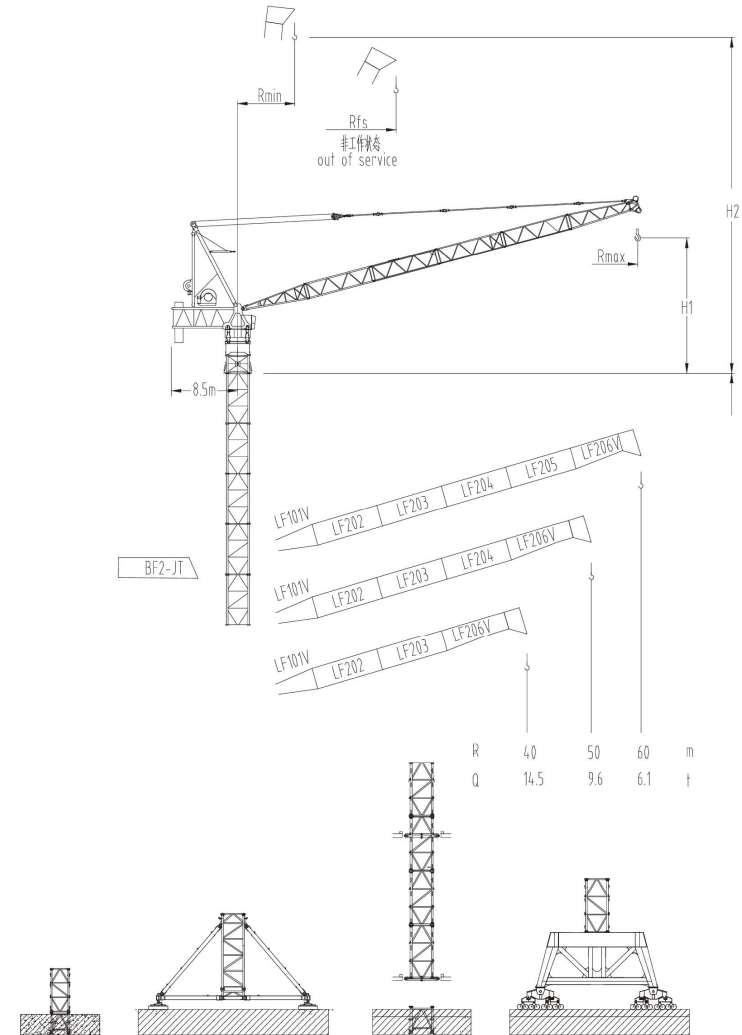


### 载荷曲线 Load Chart

R (m)	倍率 Fall	R(Cmax) (m)	Cmax (t)	20	25	30	35	40	45	50	55	60
60	●	36	16	16	16	16	16	14.4	11.6	9.4	7.6	6.1
		20	32	32	24.4	22.3	17.5	13.9	11.1	8.9	7.1	5.6
50	●	36.3	16	16	16	16	16	14.5	11.9	9.6		
		23	32	32	28.6	22.3	17.5	14	11.4	9.1		
40	●	36.3	16	16	16	16	16	14.5				
		23	32	32	28.6	22.3	17.5	14				

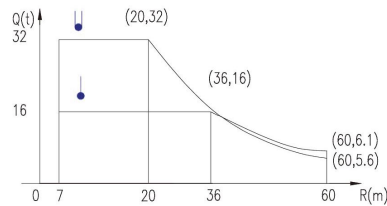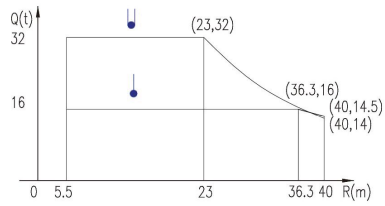

特殊载荷可定制, 请咨询  
Special data is available. Additional Loads on request

### 自立塔身高度 Self-supporting Tower Height

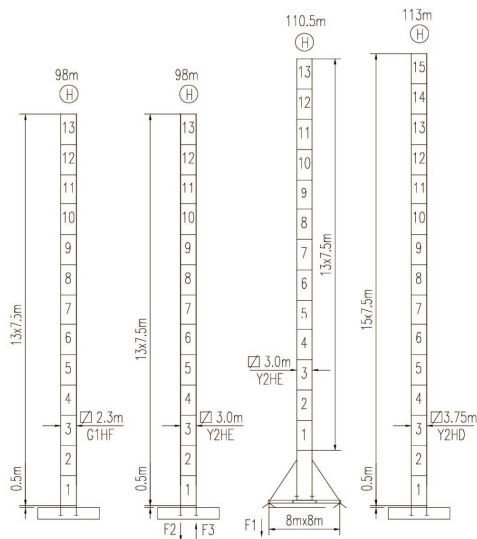

F1	●	■
	155t	157t
		*

F2	●	■
	457t	502t
F3	●	■
	337t	407t
	203t	


■ 工作状态支反力 In service reaction  
 ■ 非工作状态支反力 out of service reaction  
 ⚖️ 整机自由高度重量 (不含平衡重及压重)  
 Total weight of free standing crane (excludes counter weight & ballast)

JLD600/32t

### 附着塔机 Braced Crane

□2.3m

### 内爬塔机 Internal Climbing Crane

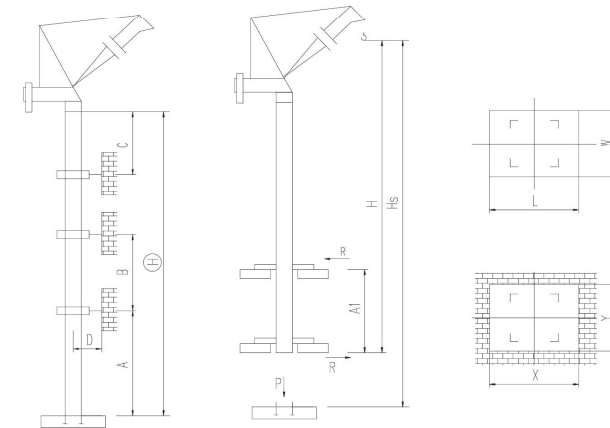

塔身 Mast	A (m)	B(m)	C (m)	D (m)	H(m)
G1HF	79	55	67	>4	440*

附着层数 Number of tie collars = (H-A-C) / B + 1

塔身 Mast	Hs(m)	H(m)	A1(m)	P(t)	R(t)	X(m)	Y(m)	L(m)	W(m)
G1HF					*				

### 主要性能参数 Specifications

机构 Mechanism	●		▼		电动机 Motor		
	m/min	t	m/min	t		kW	
▲ ● ▼	200LF110R9	0-36	16	0-18	32	900m	110
		0-45	13	0-22.5	26		
		0-90	6	0-45	13		
▲ ● ▼	200LF160R9	0-48	16	0-24	32	900m	160
		0-60	13	0-30	26		
		0-120	6	0-60	13		
▶	226RA76R380	4 min				75	
⚙️	15RFCV	0-0.4 rpm				2x15	
⚙️	RTT	*					

电压 Voltage	kVA
380V (±10%)	*

\*与制造商联系咨询 Contact us, please

本技术参数不受法律约束, 技术信息请详见相应说明书。  
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



hnjzk.com

保留修改权力, 恕不另行通知 | Subject to modifications

2500系列

2500系列