



Rmax m	H1 m	Rmin m	H2 m	Rfs m
48.5	15.5	8	55	48.5

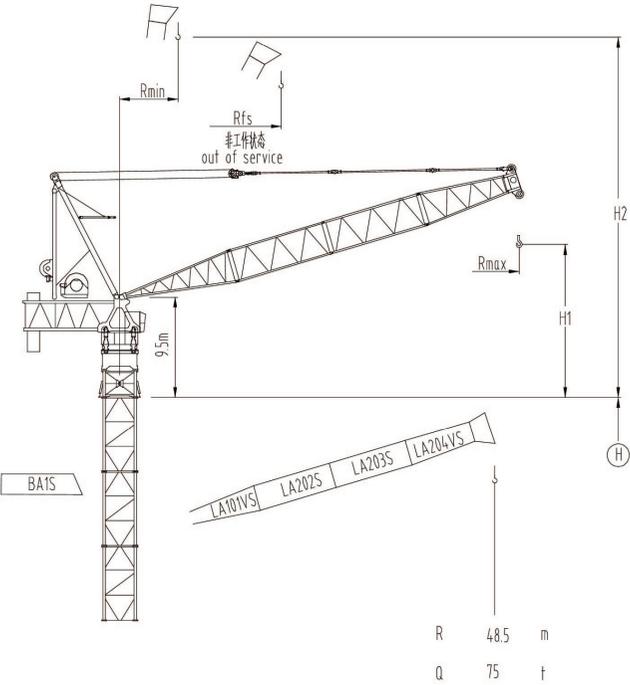


R 48.5 m
Q 75 t




载荷曲线 Load Chart

R (m)	倍率 Fall	R(Cmax) (m)	Cmax (t)	15	17.5	20	25	30	35	40	45	48.5
48.5		10	700	443	369	313	235	182	143	114	91	75

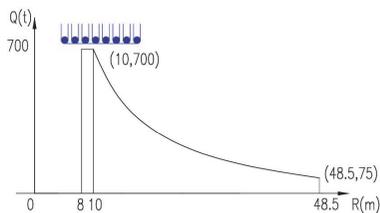

特殊载荷可定制, 请咨询
Special data is available. Additional Loads on request

自立塔身高度 Self-supporting Tower Height

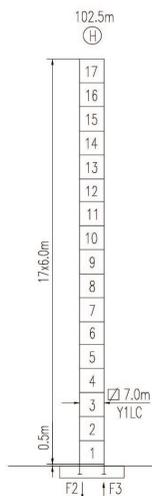


F2	1176t	649t
F3	184t	94t
	1100t	

■ 工作状态支反力 In service reaction ■ 非工作状态支反力 out of service reaction
 整机自由高度重量 (不含平衡重及压重)
 Total weight of free standing crane (excludes counter weight & ballast)

JLD7000/700t

附着塔机 Braced Crane

7.0m

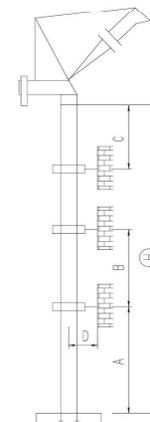

塔身节 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
Y1LC	88	61	74	>6.5	200*

附着层数 Number of tie collars = (H-A-C) / B + 1

主要性能参数 Specifications

机构 Mechanism				电动机 Motor
	m/min	t		kW
	0-4.4	700	2x1600m	2x315
	0-5	560		
	0-10	280		
	400RA315R380		6 min	315
	24RFCV		0 - 0.3 rpm	4x24
	RTT		*	

电压 Voltage	kVA
380V (±10%)	*

*与制造商联系咨询 Contact us, please

本技术参数不受法律约束, 技术信息请详见相应说明书。
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



hnjlk.com

保留修改权力, 恕不另行通知 | Subject to modifications