



Rmax m	H1 m	Rmin m	H2 m	Rfs m
68.5	18.2	9	72.4	42
59	13.8	8.5	62.2	40
49	11.7	8	51.9	49

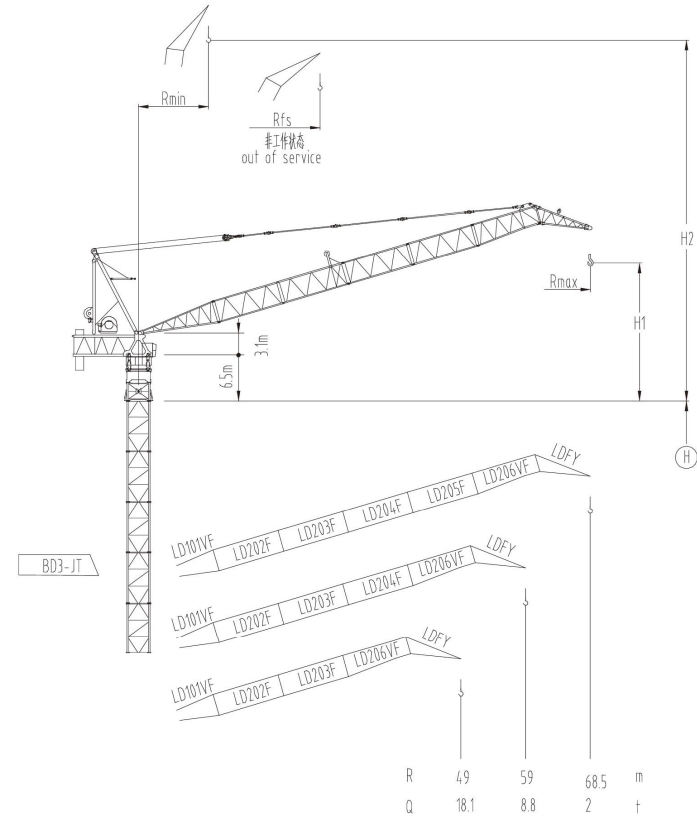


载荷曲线 Load Chart

R (m)	倍率 Fall	R(Cmax) (m)	Cmax (t)	15	17.5	20	25	30	35	40	45	47.5	50	55	57.5	60	65	68.5
68.5		13.5	180	158	130	106	76	56	42.5	32	23	19.6	16.8	11.8	9.7	7.6	4.1	2
59		13.8	180	161	133	109	78	58	43.5	33	24	20.1	17.3	12.3	10.2			
49		13	200	166	133	113	80.4	61.2	47	36.3	28.3	22.5						

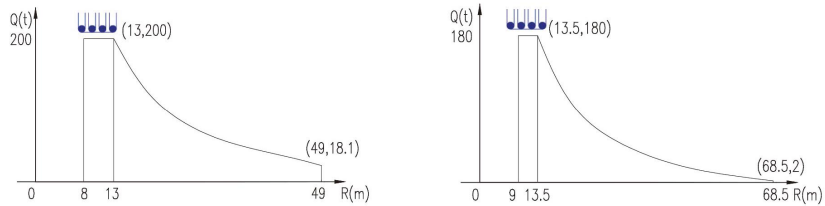

特殊载荷可定制，请咨询
Special data is available. Additional Loads on request

自立塔身高度 Self-supporting Tower Height

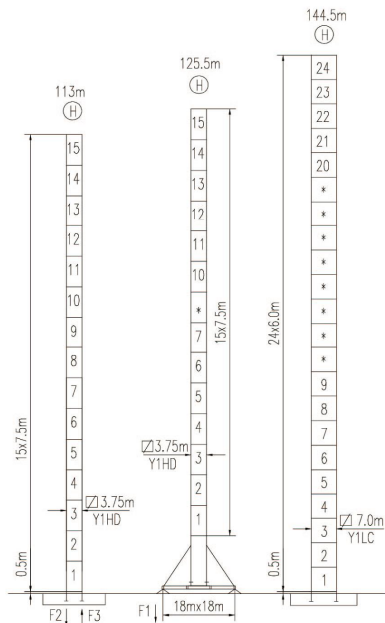

F1	380t	308t
		*

F2	1032t	1139t
F3	587t	825t
	813t	

■ 工作状态支反力 In service reaction
 ■ 非工作状态支反力 out of service reaction
 ● 整机自由高度重量 (不含平衡重及压重)
 Total weight of free standing crane (excludes counter weight & ballast)

JLDF2600/200t

主要性能参数 Specifications

机构 Mechanism					电动机 Motor	
		m/min	t		kW	
▲ ● ▼	300LF220R16	0-5.2	200	1600m	220	
		0-6.5	160			
		0-13	80			
▼	300LF315R16	0-7.7	200	1600m	315	
		0-9.5	160			
		0-19	80			
	300RA110R380	4 min			110	
	15RFCV	0 - 0.3 rpm			3x15	
	RTT				*	

电压 Voltage	
380V (±10%)	*

*与制造商联系咨询 Contact us, please

本技术参数不受法律约束，技术信息详见相应说明书。
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

3200系列



hnjzlk.com

保留修改权力，恕不另行通知 | Subject to modifications