
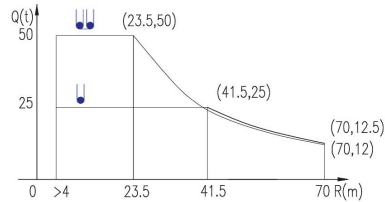



载荷曲线 Load Chart

R (m)	倍率 Fall	R(Cmax) (m)	Cmax (t)	25	30	35	40	45	50	55	60	65	70
70	●	41.5	25	25	25	25	25	22.7	19.9	17.6	15.5	14	12.5
		23.5	50	45.3	36.4	30.3	25.7	22	19.2	17	15	13.5	12
60	●	43	25	25	25	25	25	23.5	20.7	18.2	16.5		
		24.2	50	47	37.9	31.5	26.7	23	20	17.8	15.6		
50	●	44.5	25	25	25	25	25	24.3	21.5				
		25	50	50	38.9	32.4	27.5	23.7	20.8				

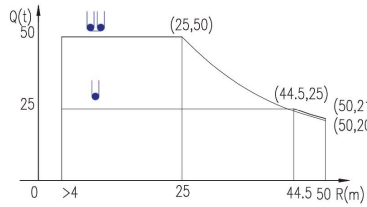

特殊载荷可定制, 请咨询
Special data is available. Additional Loads on request

自立塔身高度 Self-supporting Tower Height

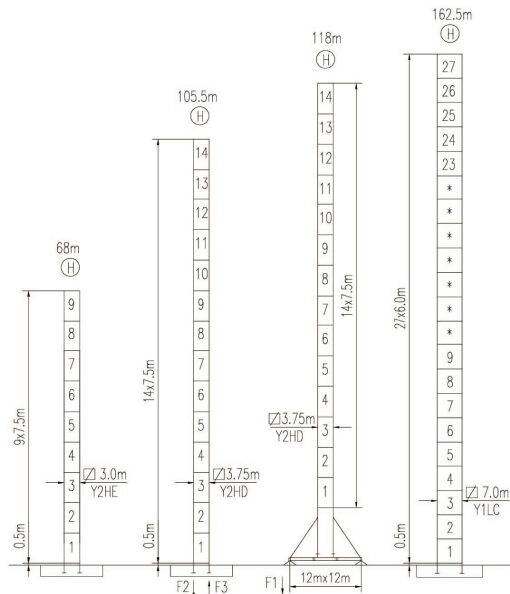

F1	250t	265t
F2	514t	606t
F3	223t	334t
	393t	


■ 工作状态支反力 In service reaction ■ 非工作状态支反力 out of service reaction
● 整机自由高度重量 (不含平衡重及压重) Total weight of free standing crane (excludes counter weight & ballast)

JLP1200/50t

附着塔机 Braced Crane

□ 3.0m

内爬塔机 Internal Climbing Crane

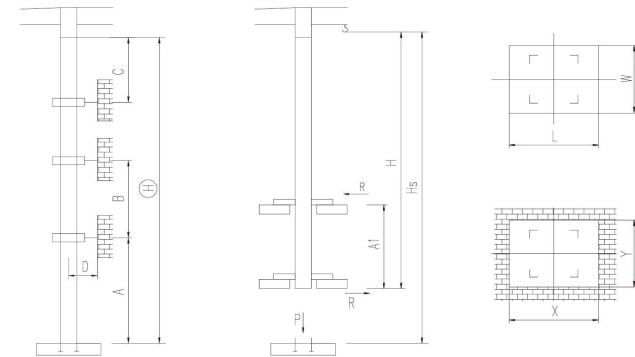

塔身 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
Y2HE	49	34	42	>5.5	225*

附着层数 Number of tie collars = (H-A-C) / B + 1

塔身 Mast	Hs (m)	H (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
Y2HE					*				

主要性能参数 Specifications

机构 Mechanism	●		●		电动机 Motor kW	
	m/min	t	m/min	t		
▲ 200LF110R9	0-15	25	0-7.6	50	900m	110
	0-18.5	20	0-9.5	40		
	0-37	10	0-19	20		
▼ 200LF160R9	0-22	25	0-11	50	900m	160
	0-27	20	0-13.5	40		
	0-54	10	0-27	20		
◀▶ 80RA37H70	0 - 52 m/min				37	
⊙ 15RFCV	0-0.3 rpm				3x15	
⊙ RTT					*	

电压 Voltage	kVA
380V (±10%)	*

*与制造商联系咨询 Contact us, please

本技术参数不受法律约束, 技术信息请详见相应说明书。
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



hnjzk.com

保留修改权力, 恕不另行通知 | Subject to modifications