

主要性能参数 Specifications

机构 Mechanism		●		●●		电动机Motor kW
		m/min	t	m/min	t	
▲ ● ▼	100LF110R9	0-29	16	0-14.5	32	900m 110
		0-36	12.5	0-18	25	
		0-72	6	0-36	12.5	
	80LF110R9	0-36	13	0-18	26	900m 110
		0-45	10	0-22.5	20	
		0-90	5	0-45	10	
◀▶	125RA22H80	0-70 m/min				22
⊙	11RFCV	0-0.6 rpm				2x11
⊙	RTT	*				*

电压 Voltage	kVA
380V (±10%)	*

*与制造商联系咨询 Contact us, please


本技术参数不受法律约束，技术信息请详见相应说明书。
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

2500系列

JLD750

50t



Rmax m	H1 m	Rmin m	H2 m	Rfs m
60	17.4	6.5	59	40
50	14.7	5.5	59	45
40	12	5	39	40

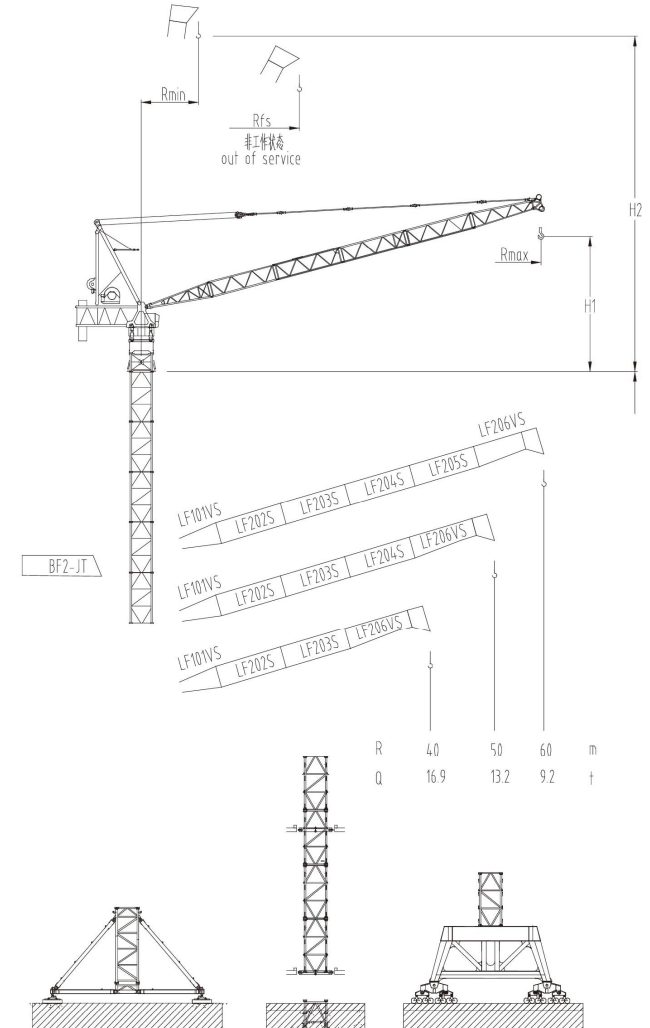

JLD750/50t


载荷曲线 Load Chart

R (m)	倍率 Fall	R(Cmax) (m)	Cmax (t)	15	20	25	30	35	40	45	50	55	60
60	●	23	25	25	25	22.9	19	16.1	14.1	12.3	11	10	9.2
	●	15	50	50	35.6	28.1	23.1	19.6	16.9	14.9	13.2	9.9	9
50	●	23	25	25	25	22.9	19	16.1	14.1	12.3	11		
	●	15	50	50	35.6	28.1	23.1	19.6	16.9	14.9	13.2		
40	●	23	25	25	25	22.9	19	16.1	14.1				
	●	15	50	50	35.6	28.1	23.1	19.6	16.9				

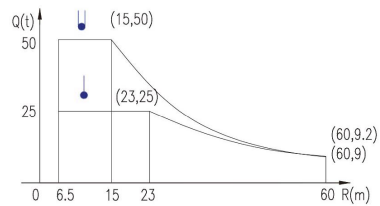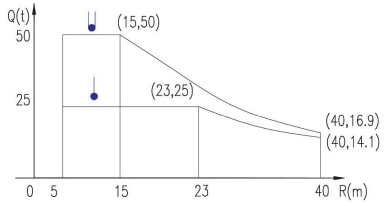

特殊载荷可定制，请咨询
Special data is available. Additional Loads on request

自立塔身高度 Self-supporting Tower Height

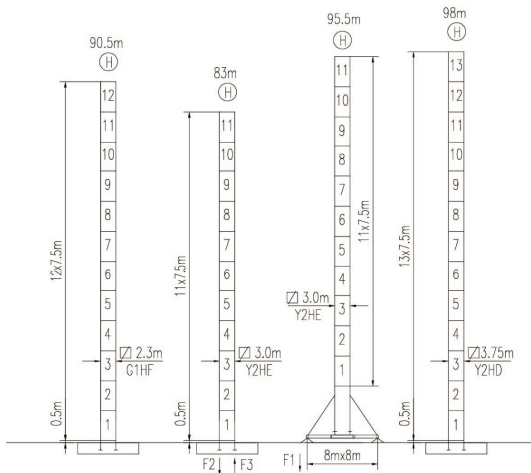

	●	■
F1	145t	132t
		*

	●	■
F2	447t	397t
F3	347t	302t
		244t


■ 工作状态支反力 In service reaction
 ■ 非工作状态支反力 out of service reaction
 ● 整机自由高度重量 (不含平衡重及压重)
 Total weight of free standing crane (excludes counter weight & ballast)

JLD750/50t

附着塔机 Braced Crane

□ 2.3m

内爬塔机 Internal Climbing Crane

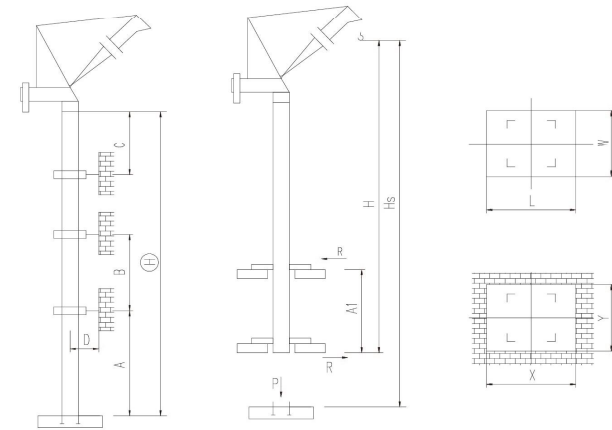

塔身 Mast	A (m)	B (m)	C (m)	D (m)	H (m)
G1HF	72	50	61	>4	440*

附着层数 Number of tie collars = (H-A-C) / B + 1

塔身 Mast	Hs (m)	H (m)	A1 (m)	P (t)	R (t)	X (m)	Y (m)	L (m)	W (m)
G1HF					*				

主要性能参数 Specifications

机构 Mechanism	●		●		电动机 Motor
	m/min	t	m/min	t	
▲ 300LF160R9	0-36	25	0-18	50	900m 160
	0-45	20	0-22.5	40	
	0-90	10	0-45	20	
▼ 300LF220R9	0-48	25	0-24	50	900m 220
	0-60	20	0-30	40	
	0-120	10	0-60	20	
225RA75R300	4 min				75
15RFCV	0-0.4 rpm				2x15
RTT					*

电压 Voltage	kVA
380V (±10%)	*

*与制造商联系咨询 Contact us, please

本技术参数不受法律约束，技术信息请详见相应说明书。
Specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.



hnjzk.com

保留修改权力，恕不另行通知 | Subject to modifications

2500系列

2500系列